

StrapPack[®]

Automatic Strapping Machine



RQ-8

RQ-8

High-Performance Automatic Strapping Machine

■ Amazing Strapping Speed

1.5 seconds per strapping cycle – That's 40 straps per minute!

■ Self-Correcting Technology

Unique self-correcting mechanisms are built into the RQ-8 operation. If the RQ-8 is operated accidentally without a package on the table, the strap will form a small loop which will be automatically ejected from the sealing unit leaving the machine ready for the next cycle.

■ Easy Strap Loading

Newly developed loading system free of complicated devices makes strap threading almost completely automatic – it's just a touch of a lever.

■ Permanently Lubricated Mechanisms

Strapack's self-lubricating design has an unsurpassed reputation for its durability and maintenance-free operation.

■ Quick Heater

Ready to operate in less than 25 seconds. Designed to insure high seal joint.

■ Self-diagnostic

A programmable microprocessor constantly monitors critical functions. Any irregularity sensed is immediately displayed.

■ Portable


Heavy-duty metal casters allow for the machine to be quickly installed or moved to any Single Phase power supply outlet.

■ Variable Tension

A wide range of tension is available to the operator by use of a single tension dial. Tension capability up to 80kg (equivalent to 150mm stroke).

■ Dependable

Strapack's advanced bandway design assures perfect strap placement and eliminates any twisted straps.

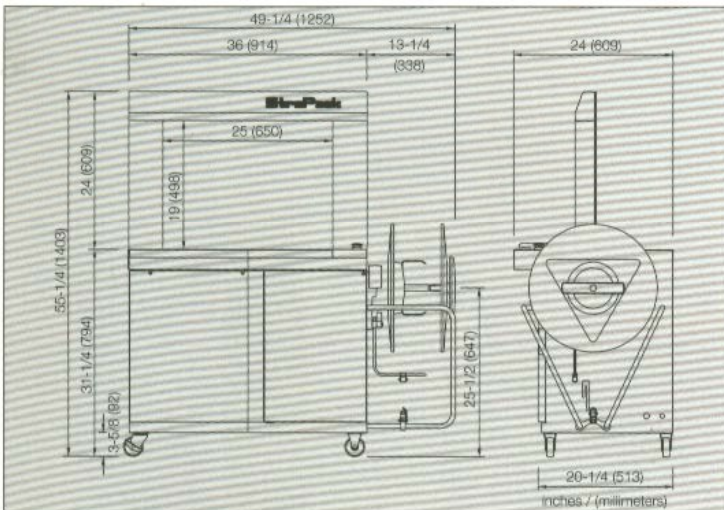

■ Standard Specifications

Dimensions	Width	49-1/4 in.	1252mm
	Height	55-1/4 in.	1403mm
	Depth	24 in.	609mm
	Weight	353 lbs.	160kg
Table Height		31-1/4 in.	794mm
Arch Size		W 25 × H 19 in.	W 650 × H 500mm
Package Size	Max	W 24-1/2 × H 18-7/8 in.	W 620 × H 480mm
	Min	W 3-1/8 × H 1-1/4 in.	W 80 × H 30mm
Joint / Strap / Coil		heat seal / polypropylene / ID 8 × OD 18 × W 8 in.	heat seal / polypropylene / ID 200 × OD 450 × W 200mm
Strap Width		1/4, 3/8, 1/2 in.	5, 6, 9, 12mm
Strap Tension		up to 176 lbsf. stroke 5-7/8 in.	up to 784N (80kgf) stroke 150mm
Speed		1.5 sec. / strap, 40 straps per min.	
Power Supply		100, 120, 200, 220, 230, 240V single phase 50 / 60Hz 0.65KVA	

■ Arch Size Chart

Size in inches/(mm) Ⓢ standard size

H	W	(25) 650	(33) 850	(41) 1050	(49) 1250	(57) 1450
15 (400)						
19 (500)		Ⓢ				
23 (600)						
31 (800)						
39 (1000)						

*Availability of arch sizes may be limited depending on strap width.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2002 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION

1-2-17, Higashi Shinbashi, Minato-ku, Tokyo 105-0021, JAPAN
 Phone 81-3-3289-1161 Fax. 81-3-3289-1160
 (URL) <http://www.strapack.com>
 (E-mail) info@strapack.com

STRAPACK INC.

30860 San Clemente St. Hayward, CA 94544 U.S.A.
 Phone 1-510-475-6000 Fax. 1-510-475-6090