



# Case Sealer

## Random Legend TB


### Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of cases.

Little David delivers packaging equipment that works for you



Dual light touch roller switch in pack table for centering & holding the box during packing

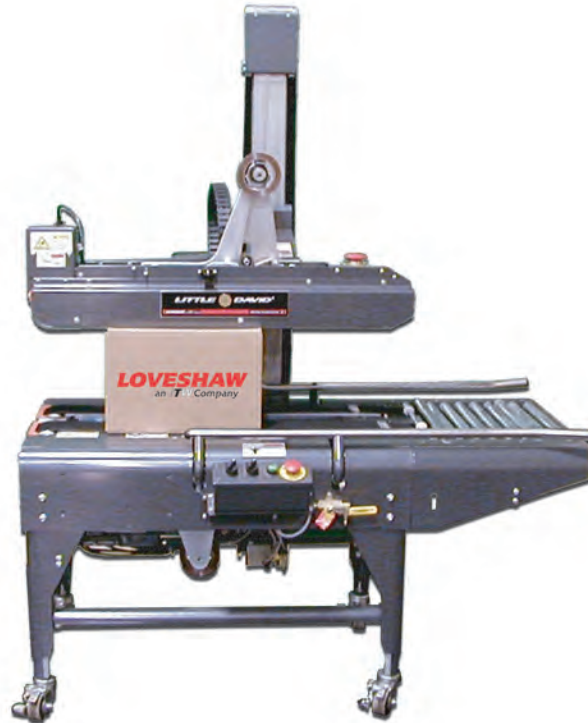

#### The Random Legend TB offers:

#### The Random Legend TB replaces:

- ☒ Instant changeover from light/void fill to heavy/overstuffed boxes
- ☒ A head that locks in place if air or power is removed
- ☒ Interchangeable tape cartridges
- ☒ Safe enclosed mast trolley system
- ☒ Heavy duty steel construction
- ☒ Light touch roller switch
- ☒ Expensive labor
- ☒ Hand taping boxes
- ☒ Unsafe machinery


Little David Random Legend TB



# Random Legend TB

## Dimensions:

Random Legend TB:

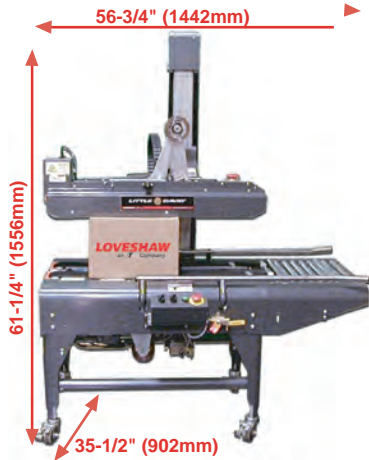

## Additional Case Sealer Models:

Also Available Random Legend:

- Semi-automatic case sealer
- Seals top and bottom of random box sizes
- Bottom drive only



Also Available LD-16R:

- Fully automatic case sealer
- Seals top and bottom of random box sizes
- Automatically closes all flaps



## Distributor Information:

## Features of the Random Legend TB:

### Reliable Performance - Warranty:

- 1 Year All Components\*
  - 2 Years Gear Reducer
  - 3 Years Cartridge\*
- \*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

### Flexible:

- Tapes boxes in a variety of sizes (see below)
- Converts from 2" to 3" wide tape (with additional parts)

### Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system for easy maintenance
- CaseLocker ST™ tape cartridge requires no lubrication
- Front roller pack table

### Safe:

- Single enclosed mast design allows clear access
- Knife guard system of the CaseLocker ST™ tape cartridge only allows the blade to be exposed only when the rollers have been depressed
- Head will lock in place if air or power is removed

## Specifications of the Random Legend TB:

### Power Requirements:

- 15 Amps @ 120 VAC
- (other voltage available, consult Loveshaw)

### Air Requirements:

- 10 SCFM at 80 psi

### Operating Speed:

- Continuous top and bottom drive; 80' per minute (24.4 m/min.)

### Closure Material: (pressure sensitive tape)

- Width: 2" or 3" Roll size: up to 15" diameter
- (min. conveyor height for 15" diameter is 23")

### Case Capacity: (with 2" wide CaseLocker ST™ Cartridge)

- |                        |                      |
|------------------------|----------------------|
| ■ Minimum:             | Maximum:             |
| Height: 4-1/2" (114mm) | Height: 24" (609mm)* |
| Width: 5-1/2" (140mm)  | Width: 20" (508mm)   |
| Length: 6" (152mm)     | Length: infinite     |
- \*Conveyor height minimum is 22-1/4"

## Options of the Random Legend TB:

- Casters
- Exit table (roller/solid)
- Head limiter
- Voltages (Consult factory)
- Various conveyor heights

**LOVESHAW**  
an ITW Company

2206 Easton Turnpike  
P.O. Box 83  
South Canaan, PA 18459  
Tel: (570) 937-4921 Fax: (570) 937-3229  
(800) 572-3434

**LOVESHAW Europe**  
A Division of ITW Ltd.

Unit 9 Brunel Gate  
West Portway Industrial Estate  
Andover, Hampshire England SP 10 3 SL  
Tel: (1264) 357511 Fax: (1264) 355964

